


Suer Concrete Weight



Freight costs for single purchase € 50,00
From 2 pcs purchase pro-rata amount € 20,00
Export ex works

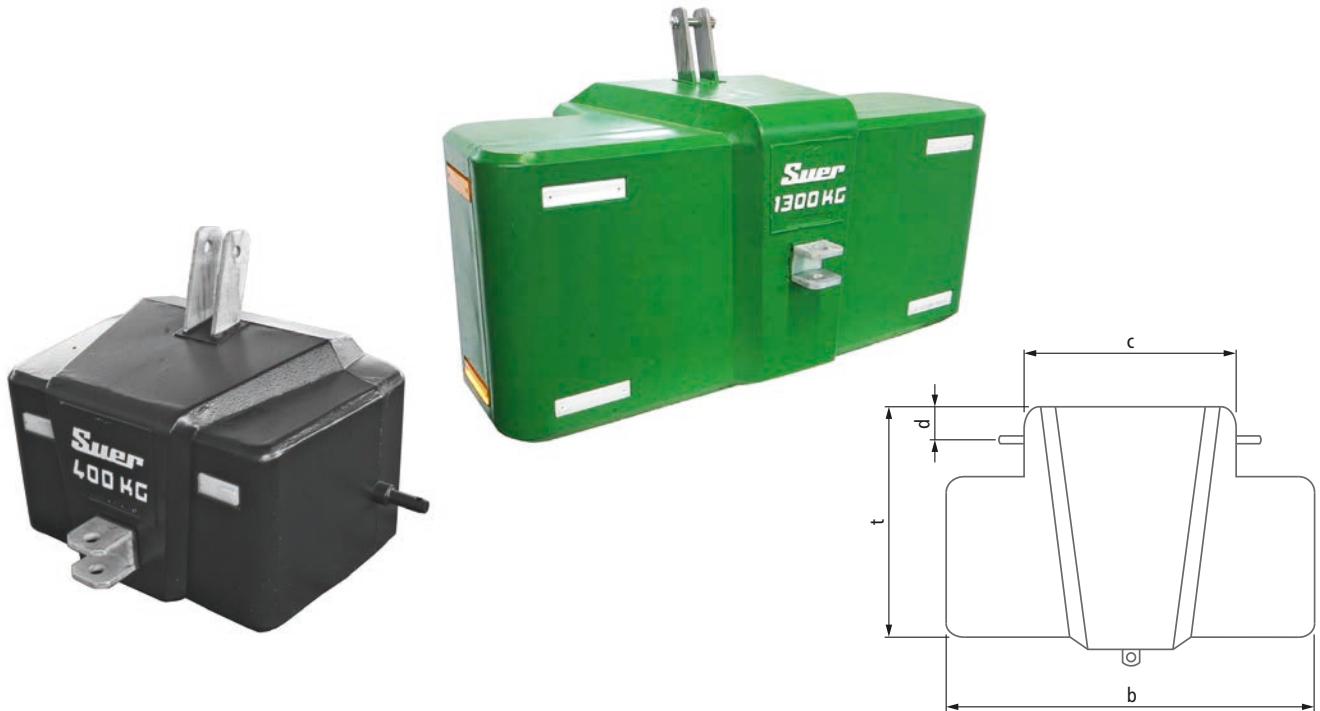

Suer concrete weight "Generation 2010" (series SB)

With shunting coupling and process connection cat. 2, low height and small installation depth, reflectors front white/side orange (400 kg front white only), shunting coupling and lower link bin galvanized ST-52.

Item No.	Colour	Weight [kg]	Dim. b [mm]	Dim. c [mm]	Dim. d [mm]	Dim. t [mm]	Height/K-point [mm]
852301000	black	400	680	560	135	520	480/185
852301001	green	400	680	560	135	520	480/185
852301002	grey	400	680	560	135	520	480/185
852301003	red	400	680	560	135	520	480/185
852301005	blue	400	680	560	135	520	480/185
852302000	black	700	1060	620	110	590	640/310
852302001	green	700	1060	620	110	590	640/310
852302002	grey	700	1060	620	110	590	640/310
852302003	red	700	1060	620	110	590	640/310
852302005	blue	700	1060	620	110	590	640/310
852303000	black	1000	1350	650	110	680	640/310
852303001	green	1000	1350	650	110	680	640/310
852303002	grey	1000	1350	650	110	680	640/310
852303003	red	1000	1350	650	110	680	640/310
852303005	blue	1000	1350	650	110	680	640/310
852304000	black	1300	1480	660	110	680	740/350
852304001	green	1300	1480	660	110	680	740/350
852304002	grey	1300	1480	660	110	680	740/350
852304003	red	1300	1480	660	110	680	740/350
852304005	blue	1300	1480	660	110	680	740/350
852305000	black	1600	1480	660	110	800	740/350
852305001	green	1600	1480	660	110	800	740/350
852305002	grey	1600	1480	660	110	800	740/350
852305003	red	1600	1480	660	110	800	740/350
852305005	blue	1600	1480	660	110	800	740/350



Suer concrete weight "Kommunal"

With shunting coupling, low height and small installation depth, reflectors front white, shunting coupling and lower link bin galvanized ST-52.

Series SBK, cat. 2 with bolt cat. 1:

Item No.	Colour	Weight [kg]	Width [mm]	Height [mm]	Depth [mm]
852300000	black	400	680	480	520
852300001	green	400	680	480	520
852300002	grey	400	680	480	520
852300003	red	400	680	480	520
852300005	blue	400	680	480	520


Series SBKK, cat. 0/1:

852306000	black	300	680	480	340
852306001	green	300	680	480	340
852306002	grey	300	680	480	340
852306003	red	300	680	480	340
852306005	blue	300	680	480	340
852307000	black	400	680	480	520
852307001	green	400	680	480	520
852307002	grey	400	680	480	520
852307003	red	400	680	480	520
852307005	blue	400	680	480	520



Series SBD, with triangle, reflectors front white
(700 kg and 1000 kg with lateral orange):

Item No.	Colour	Weight [kg]	Width [mm]	Height [mm]	Depth [mm]
852311000	black	300	680	480	340
852311001	green	300	680	480	340
852311002	grey	300	680	480	340
852300003	red	300	680	480	340
852311005	blue	300	680	480	340
852308000	black	400	680	480	520
852308001	green	400	680	480	520
852308002	grey	400	680	480	520
852300003	red	400	680	480	520
852308005	blue	400	680	480	520
852309000	black	700	1060	640	590
852309001	green	700	1060	640	590
852309002	grey	700	1060	640	590
852307003	red	700	1060	640	590
852309005	blue	700	1060	640	590
852310000	black	1000	1350	640	680
852310001	green	1000	1350	640	680
852310002	grey	1000	1350	640	680
852335002	red	1000	1350	640	680
852310005	blue	1000	1350	640	680

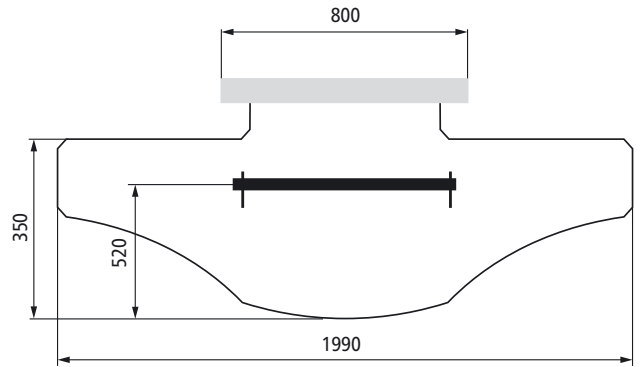


Suer rear concrete weight (series SBH)

Cat. 2, low height, suitable for p.t.o. shaft operation, without towing coupling.

Item No.	Colour	Weight [kg]	Dim. b [mm]	Dim. d [mm]	Dim. t [mm]	Height/K-Point [mm]
852341000	black	900	1990	110	340	350/520
852341001	green	900	1990	110	340	350/520
852341002	grey	900	1990	110	340	350/520
852341003	red	900	1990	110	340	350/520
852341005	blue	900	1990	110	340	350/520



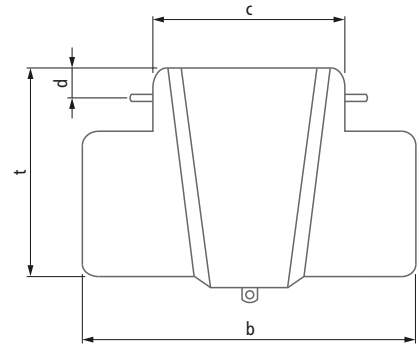

Removable pin

Suer heavy concrete weight (series SM)

With shunting coupling and process connection cat. 2 (convertible to cat. 3), low height and small installation depth, reflectors (front white/side orange), shunting coupling, upper link bracket and removable pins galvanized.

Item No.	Colour	Weight [kg]	Dim. b [mm]	Dim. c [mm]	Dim. d [mm]	Dim. t [mm]	Height/K-Point [mm]
852314004	black	1050	1060	620	110	590	640/310
852314001	green	1050	1060	620	110	590	640/310
852314000	grey	1050	1060	620	110	590	640/310
852314003	red	1050	1060	620	110	590	640/310
852314005	blue	1050	1060	620	110	590	640/310
852315004	black	1500	1350	650	110	680	640/310
852315001	green	1500	1350	650	110	680	640/310
852315000	grey	1500	1350	650	110	680	640/310
852315003	red	1500	1350	650	110	680	640/310
852315005	blue	1500	1350	650	110	680	640/310
852316004	black	2000	1480	660	110	680	740/350
852316001	green	2000	1480	660	110	680	740/350
852316000	grey	2000	1480	660	110	680	740/350
852316003	red	2000	1480	660	110	680	740/350
852316005	blue	2000	1480	660	110	680	740/350
852317004	black	2400	1480	660	110	800	740/350
852317001	green	2400	1480	660	110	800	740/350
852317000	grey	2400	1480	660	110	800	740/350
852317003	red	2400	1480	660	110	800	740/350
852317005	blue	2400	1480	660	110	800	740/350



Suer concrete weight with sliding function (series SBS)

With shunting coupling and process connection cat. 2 (convertible to cat. 3), reflectors (front white/side orange), shunting coupling, upper link bracket and removable pins galvanized. Standard with base plate 4 mm and welded galvanized wearing edge 80 × 8 mm.

Item No.	Colour	Weight [kg]	Width [mm]	Height [mm]	Center of bolt to the tractor [mm]	Center of bolt downwards [mm]
----------	--------	-------------	------------	-------------	------------------------------------	-------------------------------

Concrete slider with galvanized 4 mm base plate:

852330000	black	1250	2200	600	140	260
852330001	green	1250	2200	600	140	260
852330002	grey	1250	2200	600	140	260
852330003	red	1250	2200	600	140	260
852330005	blue	1250	2200	600	140	260
852332000	black	2400	2750	900	170	450
852332001	green	2400	2750	900	170	450
852332002	grey	2400	2750	900	170	450
852332003	red	2400	2750	900	170	450
852332005	blue	2400	2750	900	170	450



Removable pin

Concrete slider with galvanized 4 mm base plate and rubber 2200 × 258 × 30 mm (Soft touch):

852335000	black	1250	2200	600	140	260
852335001	green	1250	2200	600	140	260
852335002	grey	1250	2200	600	140	260
852335003	red	1250	2200	600	140	260
852335005	blue	1250	2200	600	140	260

When using the special version, walking speed should be maintained.

The rubber should not be adjusted more than 30 mm downwards (less wear).

An insert angle of 3 ° is recommended (increasing from the bottom of the weight to the tractor)..

Heavy concrete slider Magnetit with removable pins cat. 3:

852333000	black	3600	2750	900	170	450
852333001	green	3600	2750	900	170	450
852333002	grey	3600	2750	900	170	450
852333003	red	3600	2750	900	170	450
852333005	blue	3600	2750	900	170	450